

NVR12-16400PFAN(1U)


16CH 12MP Face Recognition PoE NVR with alarms, and NDAA compliance

Provision-ISR's NVR12-16400PFAN(1U) is an NDAA-compliant high-performance network video recorder with an integrated 16-channel PoE switch for high-definition surveillance, supporting Face Recognition and advanced Video Analytics (DDA). The device, suitable for small-sized installations (up to 16 channels), features 8 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project.

16
CH

**CHECK
POINT
EMBEDDED**

12
MP

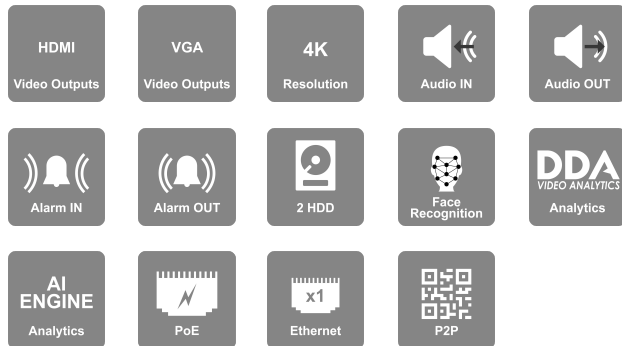

MAIN FEATURES

Video:

- Input: 16 Channel Support
- 16 Channel PoE / Standard Network Connection (Via 16 x RJ-45 / Network)
- Output: HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280×1024, 1024×768)

Bandwidth:

- Incoming: 160Mbps
- Outgoing: 160Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion
- Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.

Recording:

- 16CH 12MP Real-Time
- FPS: 400 (PAL) / 480 (NTSC)

Playback:

- Local: 16Ch Simultaneously
- Remote: 16Ch Simultaneously

Audio:

- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output
- 2 Way Audio

Alarm:

- Input: 8+IPC
- Output: 4+IPC

Storage:

- 2 x SATA (Up to 10TB each)

USB Port:

- 2 USB 2.0 Port + 1 USB 3.0 Port

Network:

- 1 x RJ-45: 10/100/1000Mbps Each

Remarks:

- The following features are based on firmware v1.4.12_79765_RD250627 and are subject to firmware version changes.



SPECIFICATIONS

3rd Party Cyber Protection	
General	Quantum IoT Nano agent by Check Point™
Protection Methods	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	16Ch over Network
Output	HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)
View Mode	Mirrored
Fish-Eye Dewarp	VMS + Local (1 at a time) + Web (1 at a time)
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch – 12MP ; 4Ch – 4MP ; 9-16Ch – D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC outputs IP Speaker
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.
Analytics Channels (IPC Based)	16Ch (Requires supporting IPC)
Analytic Channels (NVR Based)	Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (IPC does Detection) (or their combinations) Supported Resolution: 1MP – 4K
Face Recognition Rate	18 Faces per second (6Ch supported)
Bandwidth	
Incoming	160Mbps

NVR12-16400PFAN(1U)

Outgoing	160Mbps
-----------------	---------

Record/ Main Stream

Real-Time Recording	16CH 12MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	480FPS(NTSC)/400FPS(PAL)
8MP	480FPS(NTSC)/400FPS(PAL)
5MP and lower	480FPS(NTSC)/400FPS(PAL)
Master stream over network	Up to 12CH@Recording Resolution

Substream

Resolution substream	Depends on IPC
-----------------------------	----------------

Remote view

Max Channel View	80Ch (Limited to Outgoing Bandwidth Capacity)
-------------------------	---

Remote Applications

User Access	64 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback) *P2P WEB connetion always requires Plugin
Plug-in based Web-Browser	Internet Explorer

Playback

Local	16Ch
Remote	16Ch

NVR12-16400PFAN(1U)

Search Mode	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
--------------------	---

Backup	
USB	2 USB 2.0 Port + 1 USB 3.0 Port
Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)

Alarm	
Alarm-in	8+IPC
Alarm-out	4+IPC

Storage	
HDD	2
HDD Max Capacity	10TB
E-Sata Support	No
Total HDD Max Capacity	20TB
RAID	N/A

PTZ	
Connection	via Network
Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
RS-485	Yes (C06 Keyboard Connection)

Network	
Ethernet	1000/100/10Mbps self-adaptive Ethernet interface
Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report Input + Output (Ossia VMS)
ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)

PoE	
PoE Ports	16xRJ45

NVR12-16400PFAN(1U)

Speed	10/100Mbps (10Mbps under CCTV Mode)
Standard	PoE (IEEE802.3AF/AT)
CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	150W (Average 9.3W per Channel)
Max. Power Output (Per Ch.)	~25.5W

Others	
Power Supply	DC 48V/3.75A
Power consumption (No HDD)	20W
Dimension	380 × 268 × 48.1 mm
Operation Temperature	0°C~50°C